

# The Cube L – Product Specification



## The Joe Brown Collection – Natural Play

In memory of and homage to the pioneer of rope play equipment, the Berliner Seilfabrik is releasing a new range of equipment called “the Joe Brown Collection” in autumn 2014.

“Natural” fun is also provided by the second model of the Joe Brown Collection. The Cube makes use of two classic playground designs. The space net offers kids maximal development possibilities when climbing and romping about. Wood as a natural material provides warmth and blends into the surroundings. In addition, The Cube impresses through its futuristic design.

### The Cube L - At a glance.

Product Family:	<b>Joe Brown Collection</b>	Number of Foundations:	<b>3 pc.</b>
Item Number:	<b>90.100.043.3</b>	Concrete Volume C20/C25:	<b>2.2 m<sup>3</sup> (78 ft<sup>3</sup>)</b>
Children's Age:	<b>5+</b>	Number of skilled installers required:	<b>3 persons</b>
Fall Height (DIN EN 1176):	<b>2.63 m (8'-8")</b>	Installation Time without foundation:	<b>8 hours</b>
Length x Width x Height:	<b>5.1 m x 4.4 m x 4.5 m (16'-9" x 14'-6" x 14'-10")</b>	Dimensions of largest part:	<b>1.5 x 0.3 x 0.2 m (4'-11" x 0'-12" x 0'-8")</b>
Protective Surfacing Area (DIN EN 1176):	<b>8.2 m x 7.6 m</b>	Weight of heaviest part:	<b>60 kg (133 lbs)</b>
Protective Surfacing Area (ASTM 1487):	<b>8.7 m x 8.1 m (28'-7" x 26'-7")</b>	Shipping Volume:	<b>8 m<sup>3</sup> (283 ft<sup>3</sup>)</b>
Minimum space required DIN EN 1176:	<b>57.6 m<sup>2</sup></b>	Spare part guarantee:	<b>Lifelong</b>
Minimum space required ASTM 1487:	<b>54.9 m<sup>2</sup> (591 ft<sup>2</sup>)</b>		




**Berliner**  
Berliner Seilfabrik  
Play Equipment Corporation  
96 Brookfield Oaks Drive, Suite 140  
Greenville, SC 29607

T + 1 864 627 1092  
F + 1 864 627 1178

www.berliner-playequipment.com  
info@berliner-seilfabrik.com



# The Cube L – Product Specification

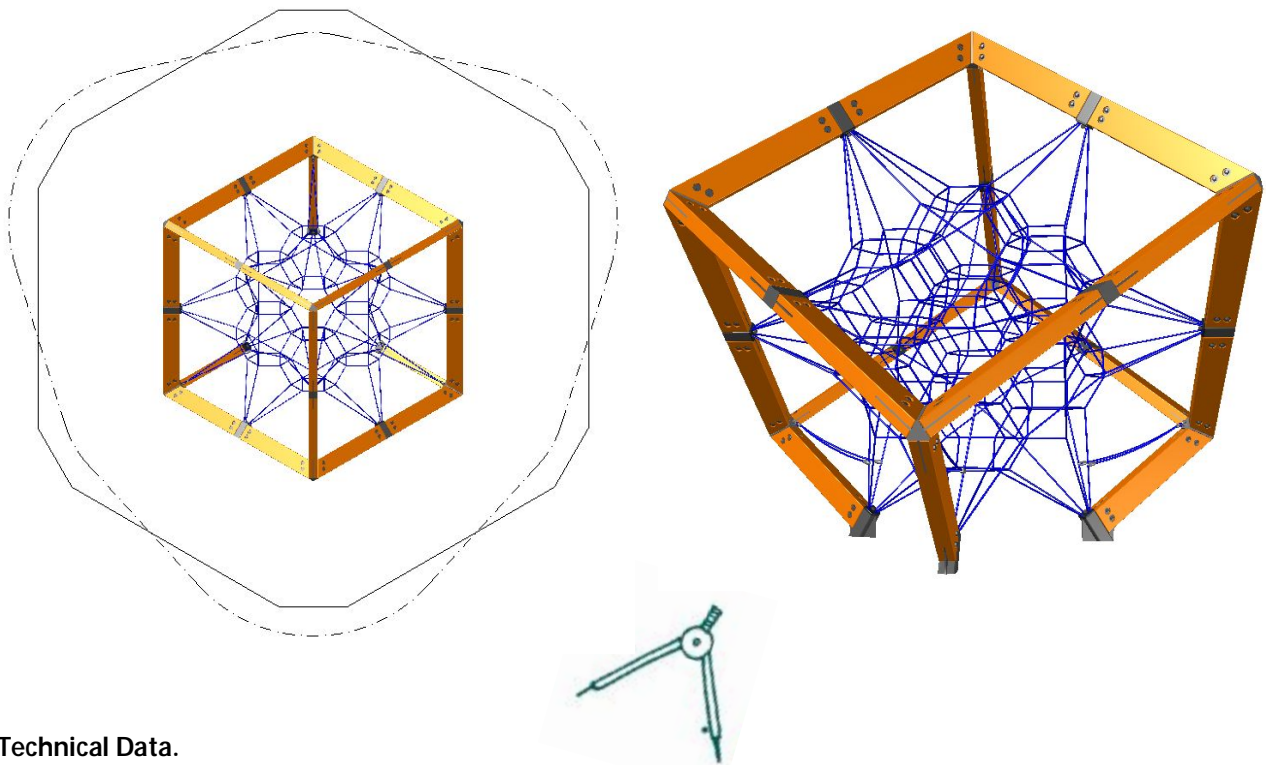

## Technical Data.

The following text can also be used for tenders.

Climbing Cube "The Cube" from the Joe Brown Collection, consisting of a larch timber structure with a 12-fold Spacial net, equipped with the ASTEM TT tension system concealed in the containers for clamping the spatial net. The foundation parts made of powder-coated steel, fitted into the wood elements, ensure the installation of the support members without direct involvement of the bottom timber carrier with the ground.

### Ropes:

U-Rope®-round strand ropes with galvanized and covered wires; external strands with non-abrasive UV-resistant Polyester-yarn (no Polypropylene): Ø 18 mm (11/16")

### Spacial netting:

Rope crossing points are localized with durable, forged aluminum-alloy cloverleaf rings and forged aluminum-alloy ballknots (no plastic connections); in situ-replaceable rope strands (no special tools required)

### Net tensioning system:

Frameworkx® clamping points; 120 x 120 x 260 mm; anti-corrosion treatment and color finish: sandblasting and solvent-free zinc-/ epoxy-/ polyester-process; connected to wooden girders with bolts on connection flanges, incorporating an Astem TT net tensioning system; securely closed with durable EPDM- caps

### Structural:

Elements of glued laminated-larch timber, connected through Frameworkx® clamping points, coconnection flanges

