

Calisthenics.02 – Product Specification



Calisthenics.02

Calisthenics.02 combines climbing and calisthenics in one, and looks good into the bargain! Whether pull-ups or hand-over-hand moves, fitness fans will be spoiled for choice when using this piece of apparatus, which is more than 9 m long. Calisthenics.02 is just one of many possible variants: the colour, shape and functionality can be tailored to your specific requirements so as to fit in with your surroundings, whether urban or natural.

Calisthenics.02 – at a glance.

Product Family:	HodgePodge	Number of Foundations:	Upon request
Item Number:	90.190.481	Concrete Volume C20/C25:	Upon request
Children's Age:	5+	Number of skilled installers required:	Upon request
Fall Height (DIN EN 1176):	2,39 m (7'-10")	Installation Time without foundation:	Upon request
Length x Width x Height:	3,2 m x 9,9 m x 2,4 m (10'-5" x 32'-6" x 7'-10")	Dimensions of largest part:	Upon request
Protective Surfacing Area (DIN EN 1176):	7,2 m x 12,9 m	Weight of heaviest part:	Upon request
Protective Surfacing Area (ASTM 1487):	6,9 m x 13,6 m (22'-5" x 44'-6")	Transportvolumen:	Upon request
Minimum space required DIN EN 1176:	68,8 m²	Shipping Volume:	Upon request
Minimum space required ASTM 1487:	69,8 m² (751 ft²)	Spare part guarantee:	Lifelong



Berliner



Berliner Seilfabrik GmbH & Co.
Lengeder Straße 2/4
13407 Berlin

Tel. +49.(0)30.41 47 24-0
Fax +49.(0)30.41 47 24-33

info@berliner-seilfabrik.com
www.berliner-seilfabrik.com

Calisthenics.02 – Product Specification

#

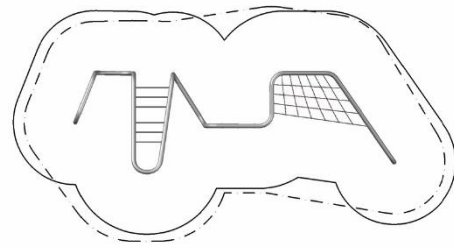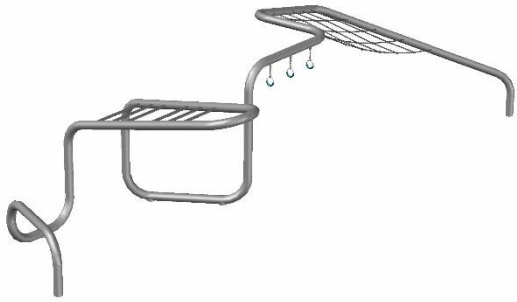

Technical Data.

The following text can also be used for tenders.

Arch-structure:

Steel pipes \varnothing 133 mm (5 1/4"); wall thickness 10 mm (3/8"); anti-corrosion treatment and color finish: sandblasting and solvent-free zinc-/ epoxy-/ polyester-process

Planar Nets:

Rope \varnothing 16 mm (5/8"), mesh size minimum 250 x 250 mm (9 4/5"); rope crossing points localized by durable, drop forged aluminum ballknots (no plastic)

Charlotte Connector:

Internal fastening system for single rope endings at the arch tubes; the fixing works without hooks or visible ferrules, pre-prepared net segments can easily get fixed permanent but replaceable inside the tubes

Hand-over-hand-ladder:

6 sash bars, stainless steel tube \varnothing 40 mm (1 9/16"), wall thickness 5 mm (3/16")

Handing rings

140 mm (5 33/64") \varnothing handing rings with red plastic grip, 200 mm (7 7/8") galvanized chain connected with stainless steel bracket and shackle




Berliner
Berliner Seilfabrik GmbH & Co.
Lengeder Straße 2/4
13407 Berlin

Tel. +49.(0)30.41 47 24-0
Fax +49.(0)30.41 47 24-33

info@berliner-seilfabrik.com
www.berliner-seilfabrik.com

Revision: November 2018

Seite 2